




## 特殊吸板 PZ 和 P2Z，章鱼式系统专用

与前面所述的所有吸板相比，这款吸板在相同的抓取面和真空度下具有更大的提升力，P2Z型的吸板还可以抓持表面粗糙和非常不规则的物体。

该吸板由轻质合金制成，有校准孔，覆盖两种不同厚度的特殊泡沫橡胶。可以与标准吸板完美互换。

在真空度至少为-75 KPa、泡沫橡胶上的吸孔总面积和安全系数为3的情况下计算其提升力。

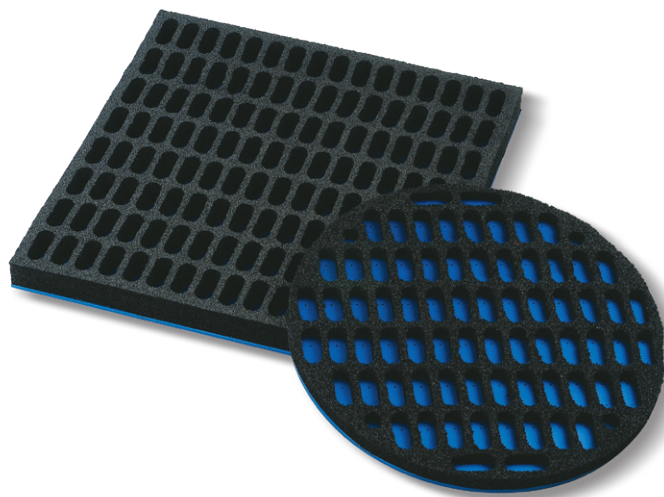

型号	吸力 Kg	A	B	C	D Ø	E	F	G	H	孔数	仅橡胶 型号	重量 Kg
PZ 15 20	41.0	150	200	42	---	5	15	18	20	24	Z 15 20	0.40
PZ 20 30	82.4	200	300	42	---	5	15	18	20	48	Z 20 30	0.80
PZ 20 40	109.8	200	400	42	---	5	15	18	20	64	Z 20 40	1.09
PZ 20 60	164.7	200	600	42	---	5	15	18	20	96	Z 20 60	1.68
PZ 30 30	123.5	300	300	42	---	5	15	18	20	72	Z 30 30	1.28
PZ 30 40	164.7	300	400	42	---	5	15	18	20	96	Z 30 40	1.67
PZ 30 50	206.0	300	500	42	---	5	15	18	20	120	Z 30 50	2.06
PZ 40 40	219.6	400	400	42	---	5	15	18	20	128	Z 40 40	2.17
PZ 40 60	329.4	400	600	42	---	5	15	18	20	192	Z 40 60	3.38
PZ 40 100	549.0	400	1000	42	---	5	15	18	20	328	Z 40 100	5.54
PZ 60 80	658.8	600	800	42	---	5	15	18	20	384	Z 60 80	6.64
PZ 60 120	988.3	600	1200	42	---	5	15	18	20	588	Z 60 120	10.05
PZ 80 100	1143.1	800	1000	42	---	5	15	18	20	660	Z 80 100	11.30
PZ D0 35	126.9	---	---	42	350	5	15	18	20	74	Z D0 35	1.26
PZ D0 50	271.1	---	---	42	500	5	15	18	20	158	Z D0 50	2.26
P2Z 15 20	41.0	200	200	42	---	5	30	18	35	24	Z2 15 20	0.44
P2Z 20 30	82.4	200	300	42	---	5	30	18	35	48	Z2 20 30	0.88
P2Z 20 40	109.8	200	400	42	---	5	30	18	35	64	Z2 20 40	1.18
P2Z 20 60	164.7	200	600	42	---	5	30	18	35	96	Z2 20 60	1.72
P2Z 30 30	123.5	300	300	42	---	5	30	18	35	72	Z2 30 30	1.33
P2Z 30 40	164.7	300	400	42	---	5	30	18	35	96	Z2 30 40	1.71
P2Z 30 50	206.0	300	500	42	---	5	30	18	35	120	Z2 30 50	2.14
P2Z 40 40	219.6	400	400	42	---	5	30	18	35	128	Z2 40 40	2.32
P2Z 40 60	329.4	400	600	42	---	5	30	18	35	192	Z2 40 60	3.48
P2Z 40 100	549.0	400	1000	42	---	5	30	18	35	328	Z2 40 100	5.84
P2Z 60 80	658.8	600	800	42	---	5	30	18	35	384	Z2 60 80	7.05
P2Z 60 120	988.3	600	1200	42	---	5	30	18	35	588	Z2 60 120	10.64
P2Z 80 100	1143.1	800	1000	42	---	5	30	18	35	660	Z2 80 100	11.85
P2Z D0 35	126.9	---	---	42	350	5	30	18	35	74	Z2 D0 35	1.42
P2Z D0 50	271.1	---	---	42	500	5	30	18	35	158	Z2 D0 50	2.39

